


ERG Graded in Fabric


sta*kleen. **Silex**
SILICONE

ERG
INTERNATIONAL


MITCHELL™
PERFORMANCE FAUX LEATHERS



Snow



Ivory




Sunshine




Sea Foam




Haze



Hot Pink



Mist



Sand



Penny




Celery




Cadet



Jelly Apple



Pewter



Golden Rod



Persimmon



Leaf



Peacock



Mulberry




Metal



Saddle



Brick




Stone



Ocean



Port



Ash



Chocolate



Malt



Khaki



Cobalt




Eggplant




Black



Raisin



Espresso



Moss



Ink

Technical Information

EN

Sta-Kleen Silicone **Silex**

COMPOSITION

Face: 100% Silicone; Backing: Polyester

WIDTH

54 inches

WEIGHT

11.0 oz./yd² ±10% / 25.6 oz./linear yd. ±10% @ 54"

ABRASION RESISTANCE

200,000 cycles, ASTM D 4157 Wyzenbeek method

LIGHTFASTNESS

1500 hours, ASTM D 4329

COLORFASTNESS TO CROCKING

Dry-5, Wet-5, AATCC8

FLAMMABILITY

California Technical Bulletin 117-2013
NFPA 260
U.F.A.C. Class I
Bs5852 Crib 5; FMVSS #302; IMO A.652 (16)8.2 & 8.3

ENVIRONMENTAL

1. No solvents, polyvinyl chloride, plasticizers, phthalates, stabilizers, heavy metals or Bisphenol A
2. No persistent organic pollutants. No formaldehyde. No toxic by-products.
3. No chemical flame retardants.

CLEANING CODE

W/S

Silex is inherently ink and stain resistant.

Remove ordinary dirt and smudges with mild soap and water. Stubborn stains can be removed by applying a small amount of 91% isopropyl alcohol to a clean, lint-free cloth. Rub the stain until it has been removed. Using fresh clean water rinse with a clean, damp cloth.

COMPLIANCE

Sta-Kleen Silicone is compliant with the following environmental, green building, and material reporting standards:

REACH
RoHS 2.0
LEED v4 and LEED MR Credit 5
CA Section 01350 VOC Emissions
Health Product Declaration (HPD)
Healthier Hospitals Initiative (HHI)
mindful MATERIALS (mM)
California Proposition 65



A PRACTICE GREENHEALTH PROGRAM

ERG International
361 Bernoulli Circle
Oxnard, CA 93030 USA
Tel: 805-981-9978
Toll Free: 1-800-446-1186
Fax: 805-981-9878
Email: sales@erginternational.com
www.erginternational.com

For additional information or sample requests visit: www.mitchellfauxleathers.com

ERG Graded in Fabric

Sparta / Hopscotch / Congo / Hudson / Payson

ERG
INTERNATIONAL



MITCHELL™
PERFORMANCE FAUX LEATHERS



Bone



Dove



Parchment



Pistachio



Aegean



Stream



Ash



Laurel



Apricot



Mink



Mediterranean



River



Fog



Rhino



Rust



Wine



Marlin




Atlantic



Iron




Walnut



Alabaster




Wheat



Flame



Ocean



Pacific



Leaf




Blackout



Linen



Cherry




Indigo



Aubergine



Thyme



Snow



Mist



Birch



Sage



Pavement



Aqua



Granite



Shield



Mocha



Lichen



Bronze



Turquoise



Black



Smoke



Coffee





Slate



Garnet




Ocean

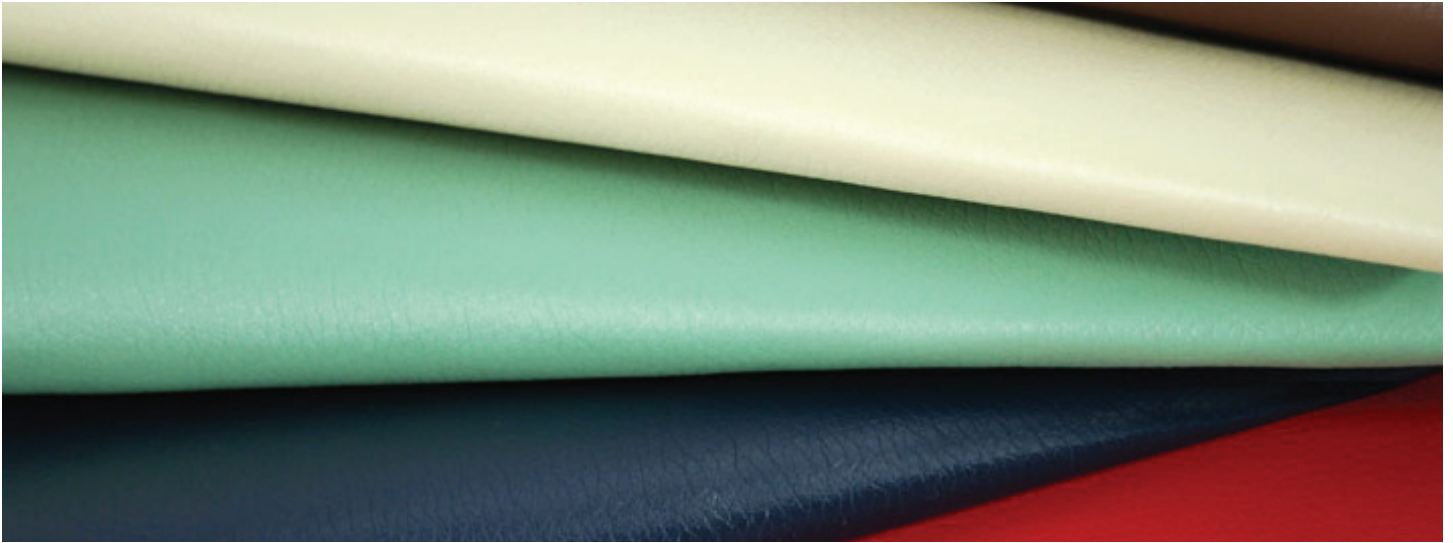


Abite



Ash



Bagel



Taupe




Avocado




Sea Mist




Fathom




Persimmon



Dijon



Lipstick




Rouge




Burgundy




Aspen



Chestnut



Cognac




Chocolate



Blueberry




Aubergine




Black




Brown




Juice Box




White



Canvas




Butter



Almond



Brown Sugar




Patriot




Dove



Cream



Sand




Mink



Rattan



Pavement



Taupe




Desert




Toffee



Merlot



Cadet



Onyx



Chocolate



Truffle

Technical Information

EN

COMPOSITION

Sparta: 100% PVC; Backing: Polyester
Hopscotch: Face: 100% PVC; Backing: Polyester
Congo: 100% Polyurethane; Backing: Polyester
Hudson: Face: 100% Polyurethane; Backing: Polyester
Payson: Face: 100% Polyurethane; Backing: Polyester

WIDTH

54 inches

WEIGHT

Sparta: 22.0 oz./yd² ±10% / 33.0 oz./ linear yd. ±10% @ 54"
Hopscotch: 25.0 oz./yd² ±10% / 37.5 oz./ linear yd. ±10% @ 54"
Congo: 14.7 oz./yd² ±10% / 22.0 oz./ linear yd. ±10% @ 54"
Hudson: 14.0 oz./yd² ±10% / 21.0 oz./ linear yd. ±10% @ 54"
Payson: 14.0 oz./yd² ±10% / 21.0 oz./ linear yd. ±10% @ 54"

ABRASION RESISTANCE

Sparta: 100,000 cycles, ASTM D 4157 Wyzenbeek method
Hopscotch: 500,000 cycles, ASTM D 4157 Wyzenbeek method
Congo: 300,000 cycles, ASTM D 4157 Wyzenbeek method
Hudson: 100,000 cycles, ASTM D 4157 Wyzenbeek method
Payson: 100,000 cycles, ASTM D 4157 Wyzenbeek method

HYDROLYSIS RESISTANCE

Sparta: not applicable
Hopscotch: not applicable
Congo: 7 weeks, ISO 1419: 1995 E
Hudson: 10 weeks, ISO 1419: 1995 E
Payson: 10 weeks, ISO 1419: 1995 E

LIGHTFASTNESS

Sparta: 250 hours, ASTM D 4329
Hopscotch: 650 hours, ASTM D 4329
Hudson: 150 hours, ASTM D 4329
Congo: 150 hours, ASTM D 4329
Payson: 150 hours, ASTM D 4329

COLORFASTNESS TO CROCKING

Sparta: Dry-4-5; W-4-5, AATCC8
Hopscotch: Dry-4, Wet-4, AATCC8
Hudson: Dry-4, Wet-4, AATCC8
Congo: Dry-4, Wet-4, AATCC8
Payson: Dry-4, Wet-4, AATCC8

FLAMMABILITY

All Patterns:
California Technical Bulletin 117-2013
NFPA 260
U.F.A.C. Class I
Sparta: FMVSS #302
Hopscotch: Boston Fire Dept. IX-1; FAA FAR 25.853;
I.M.O. A.652 (16) Sec. 8.2 & 8.3; FMVSS #302;
NFPA 701 Small Scale
Congo: IMO A.652(16)8.2
Hudson: IMO A.652(16)8.2
Payson: IMO A.652(16)8.2

CLEANING CODE

Sparta: W/S
Hopscotch: W/S
Congo: W/S
Hudson: W/S
Payson: W/S

All patterns have ink and stain-resistant finish.

Remove ordinary dirt and smudges with mild soap and water. Stubborn stains can be removed by applying a small amount of 91% isopropyl alcohol to a clean, lint-free cloth. Rub the stain until it has been removed. Using fresh clean water rinse with a clean, damp cloth.

ERG International
361 Bernoulli Circle
Oxnard, CA 93030 USA
Tel: 805-981-9978
Toll Free: 1-800-446-1186
Fax: 805-981-9878
Email: sales@erginternational.com
www.erginternational.com